


Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

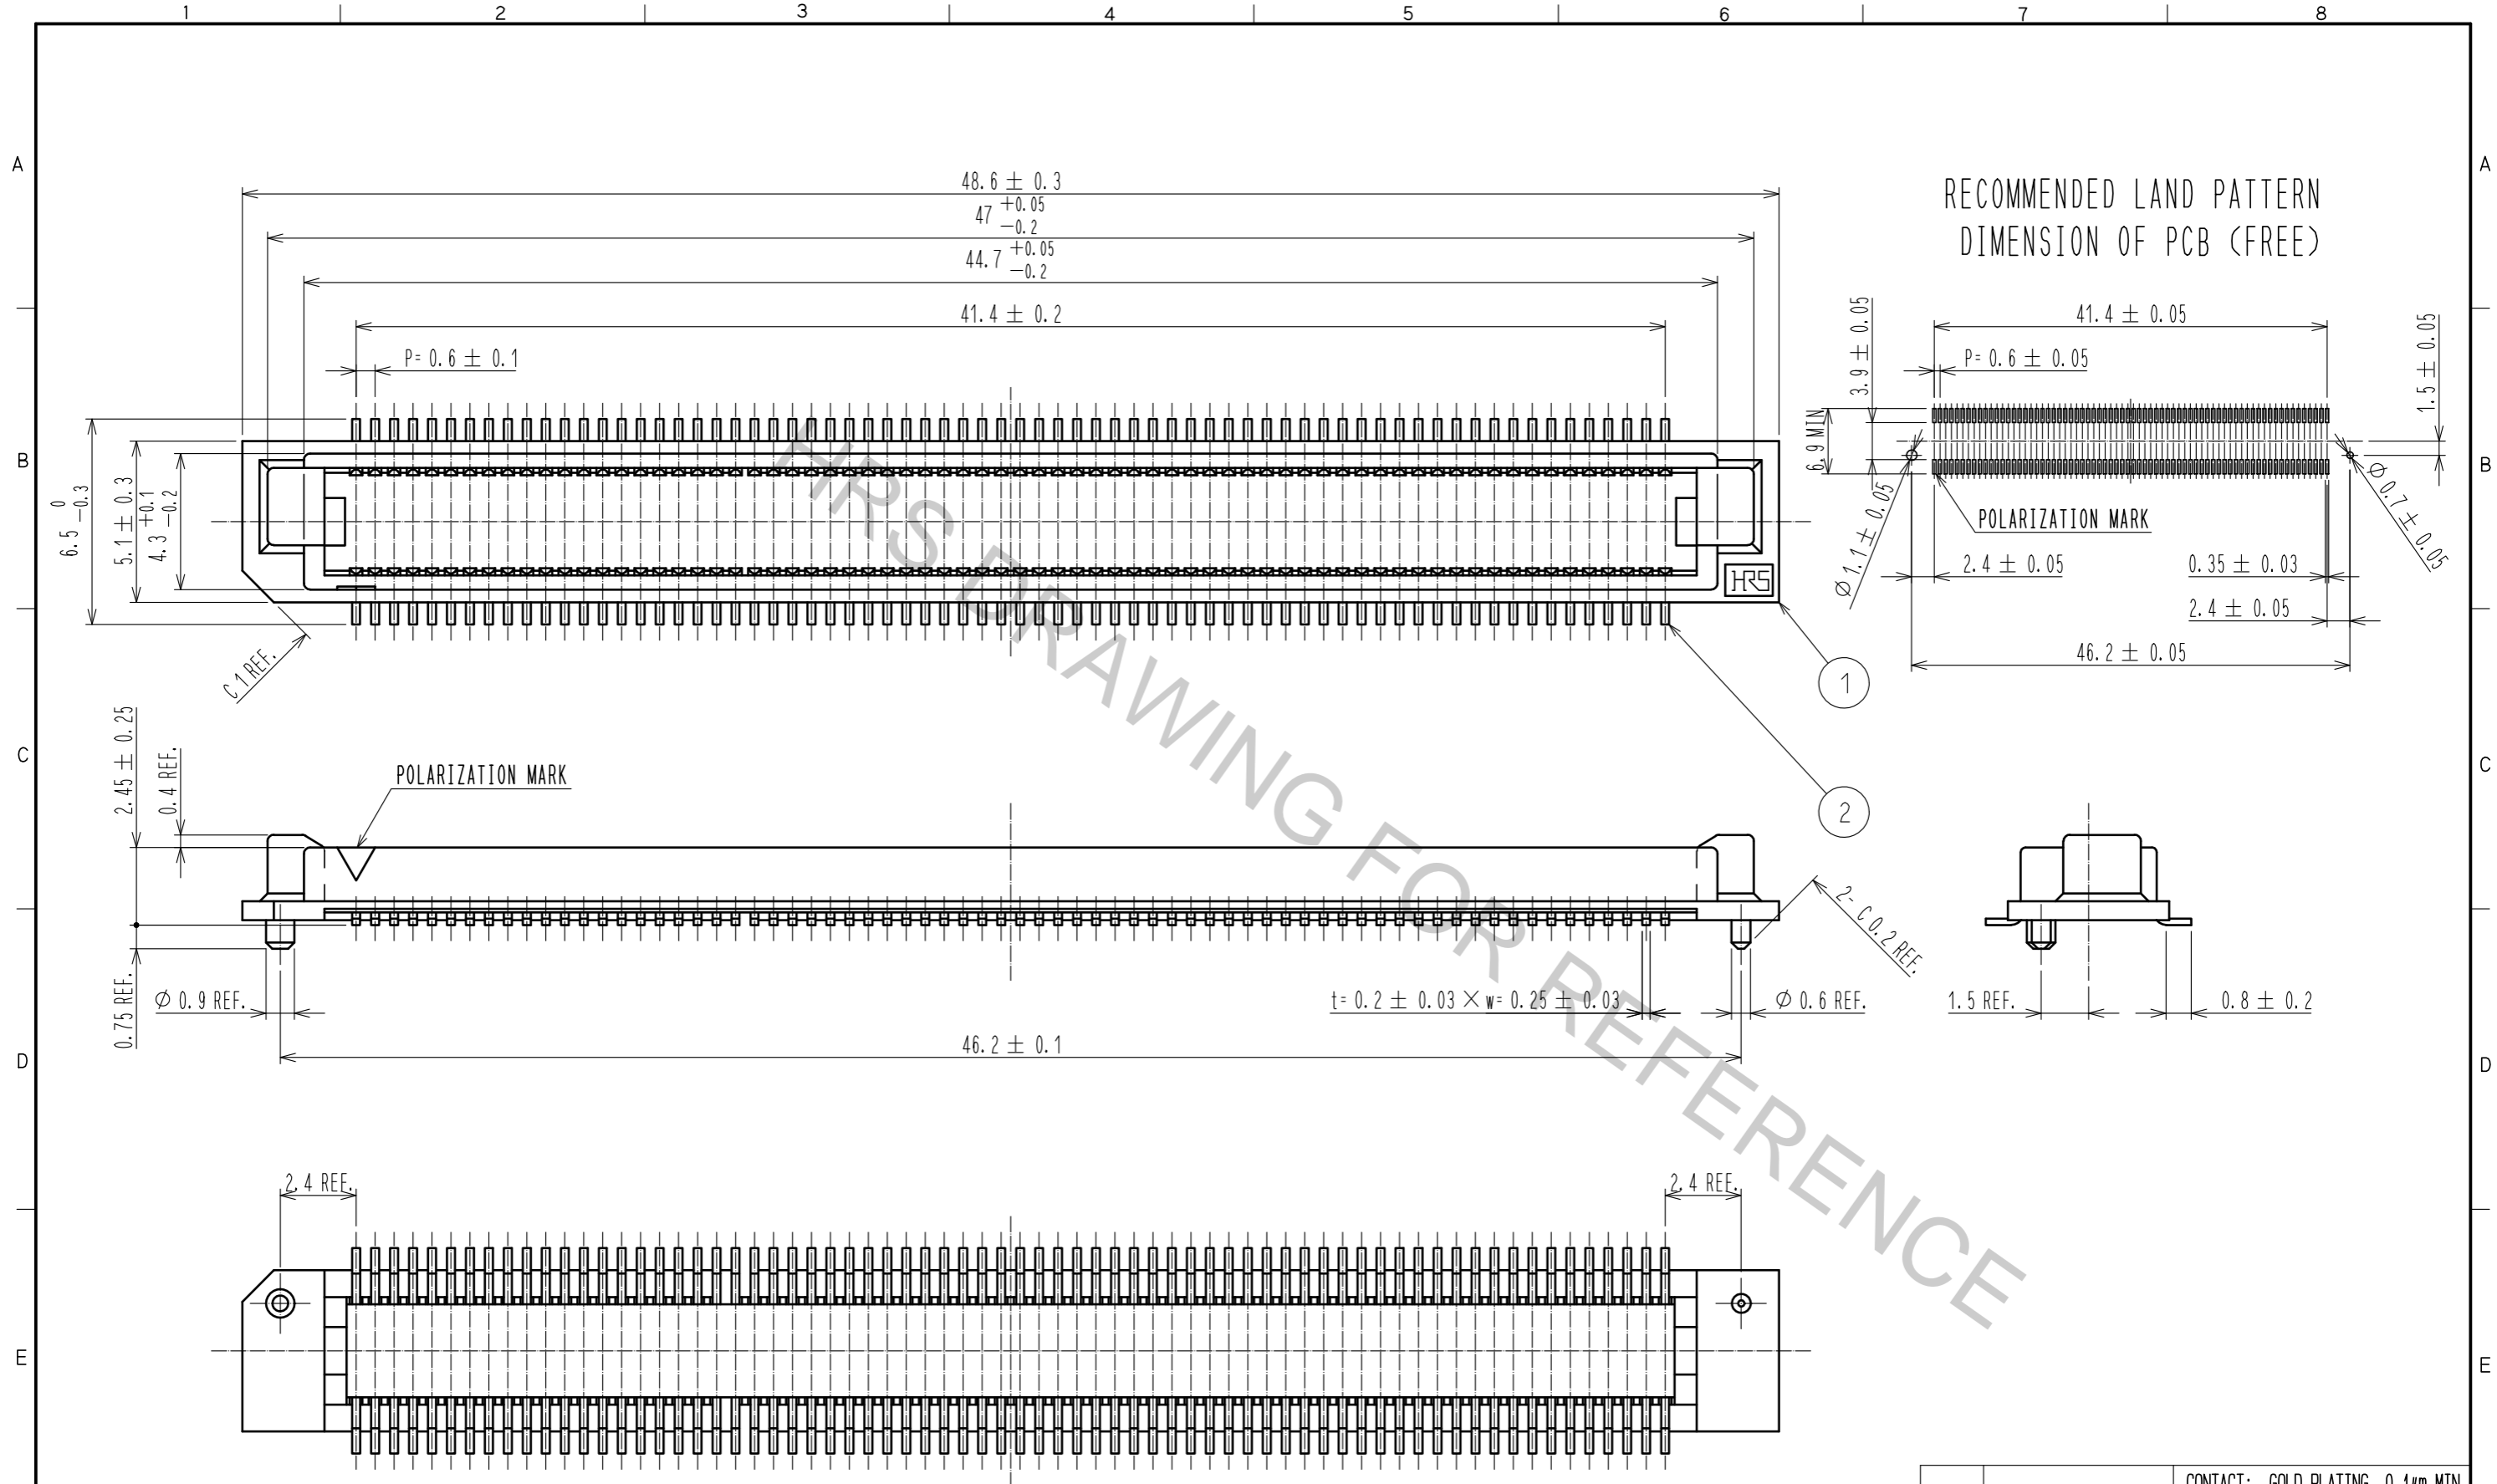

NOTE
 1. SMT LEAD-COPLANARITY: 0.1 MAX.
 2. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.

1	PPS	LIGHT BROWN, UL94V-0	2	PHOSPHOR BRONZE	CONTACT: GOLD PLATING 0.1μm MIN LEAD : GOLD PLATING 0.03μm MIN UNDER : NICKEL PLATING 0.5μm MIN		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
UNITS mm		SCALE 5:1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS	HIROSE ELECTRIC CO., LTD.	APPROVED : NH. NAKATA	16.11.21	DRAWING NO.	EDC-150568-71-00		
		CHECKED : HT. YAMAGUCHI	16.11.21	PART NO.	FX8-140P-SV(71)		
		DESIGNED : MT. ITANO	16.11.21	CODE NO.	CL578-0007-2-71		
		DRAWN : MT. ITANO	16.11.21				